



**HAMMOCKS**

## SINGLE ROPE SWING INSTRUCTIONS



**NOTE.** Instructions not to scale.

**Tip:** When using a barrel bolt with a barrel nut, place the bolt into the barrel nut and gently turn it counter clockwise until you feel a slight click. Then proceed to turn the bolt clockwise to tighten the barrel nut onto the barrel bolt.

### HARDWARE PACK



(2) 4.5" Barrel Bolts



(2) 4" Barrel Bolts




(8) 3.5" Hex Bolts



(16) Washers




(8) Lock nuts



(4) 1" Barrel Nuts

(2) Tree Hooks and  
chain sets



(1) Allen Wrench


### SUGGESTED TOOLS

- RUBBER Mallet
- PHILLIPS HEAD SCREWDRIVER
- SOCKET WRENCH
- 7/16" x 1/4" DEEP SOCKET
- 1/2" x 1/4" DEEP SOCKET

### CHAIN SET

- CHAIN SETS: (2)  
Eye Bolts, nuts, and washers attached


**NOTE.** Add chains after  
completing assembly.

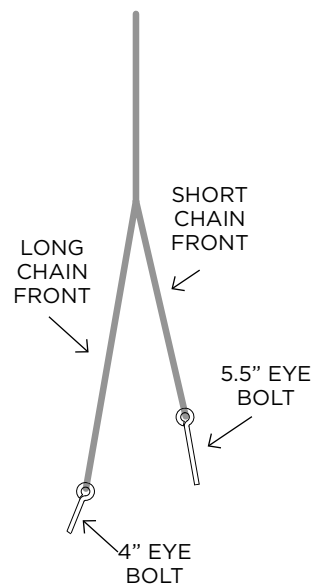


## ASSEMBLY

**STEP 1.** Set roll-up on flat surface such as a work table. Align holes of Left Arm with holes located on the side of the roll-up. Starting with back hole of arm, use 3.5" Hex Bolt with a washer on each side and secure with a locknut, repeat for 2 holes in the front of the arm. Repeat for right arm.

**NOTE.** Do **not** tighten bolts until Step 5.

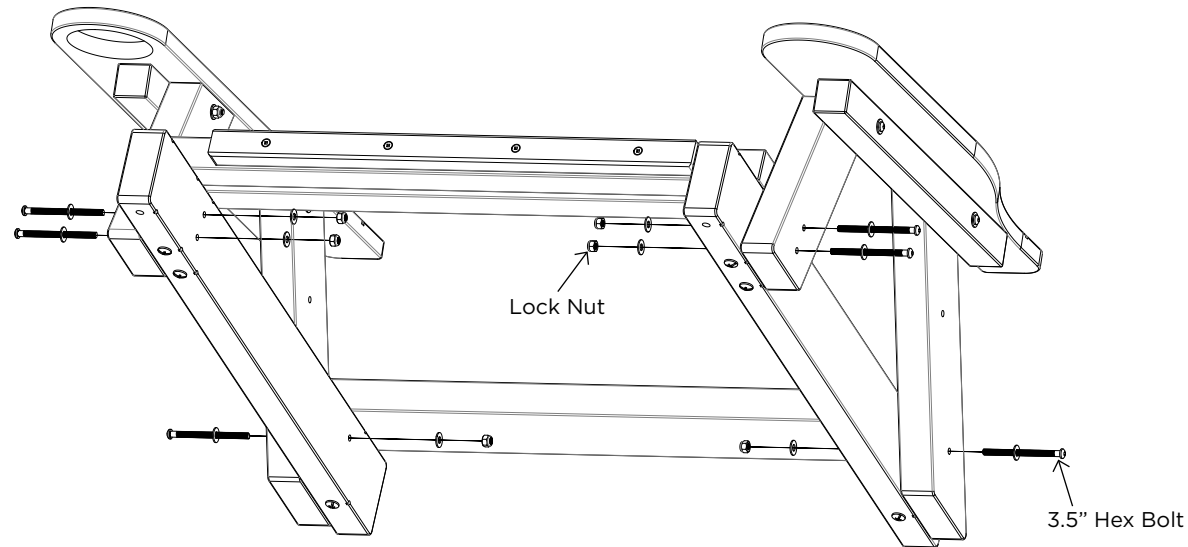


**STEP 2.** Position an upright as shown and secure it with a 3.5" Hex Bolt, a washer on each side of the material and a locknut. Repeat for the other side.

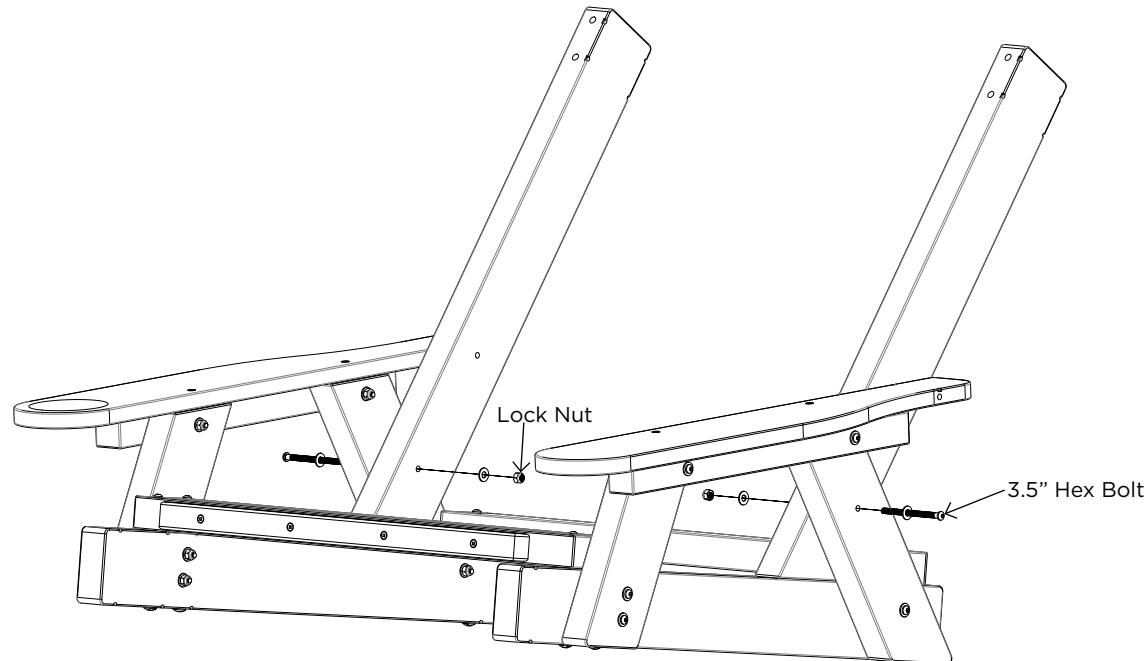


ASSEMBLY

**STEP 3.** Position uprights and align with arm holes, thread a 4” Barrel Bolt through the holes and use a barrel nut to secure, repeat with right side as shown.

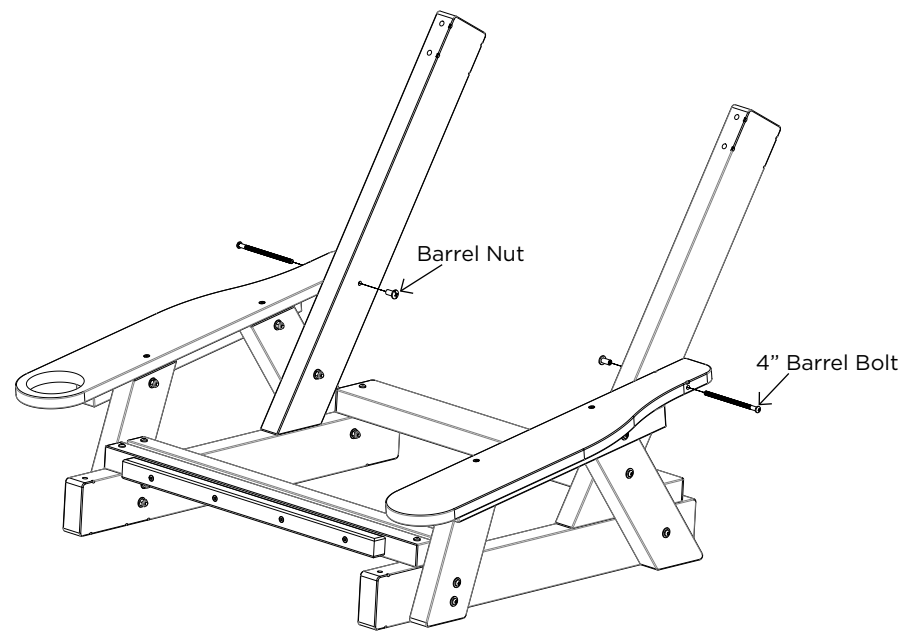


**STEP 4.** Using (2) 4.5” Barrel Bolts thread each through the bottom hole of the roll-up into the bottom hole of the upright as shown and secure using Barrel Nuts.

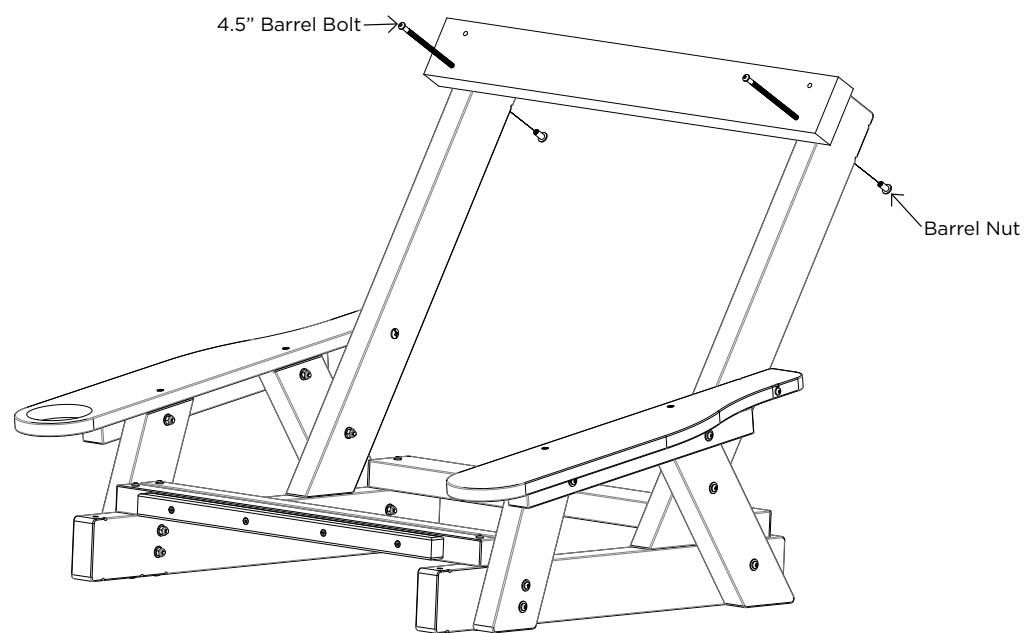

## ASSEMBLY

**STEP 5.** Using the shortest length of the chain assembly, secure bolt in upper hole in roll-up with a washer on each side of the material and a nut repeat for both sides. Repeat process using the longest length of the chain on front of roll-up. Using the spacer bar feed the chain assembly through the holes. Insert cup holder, tighten all bolts then hang the swing after properly securing tree hooks, or existing hooks approximately 25"-30" apart. Enjoy your new swing!

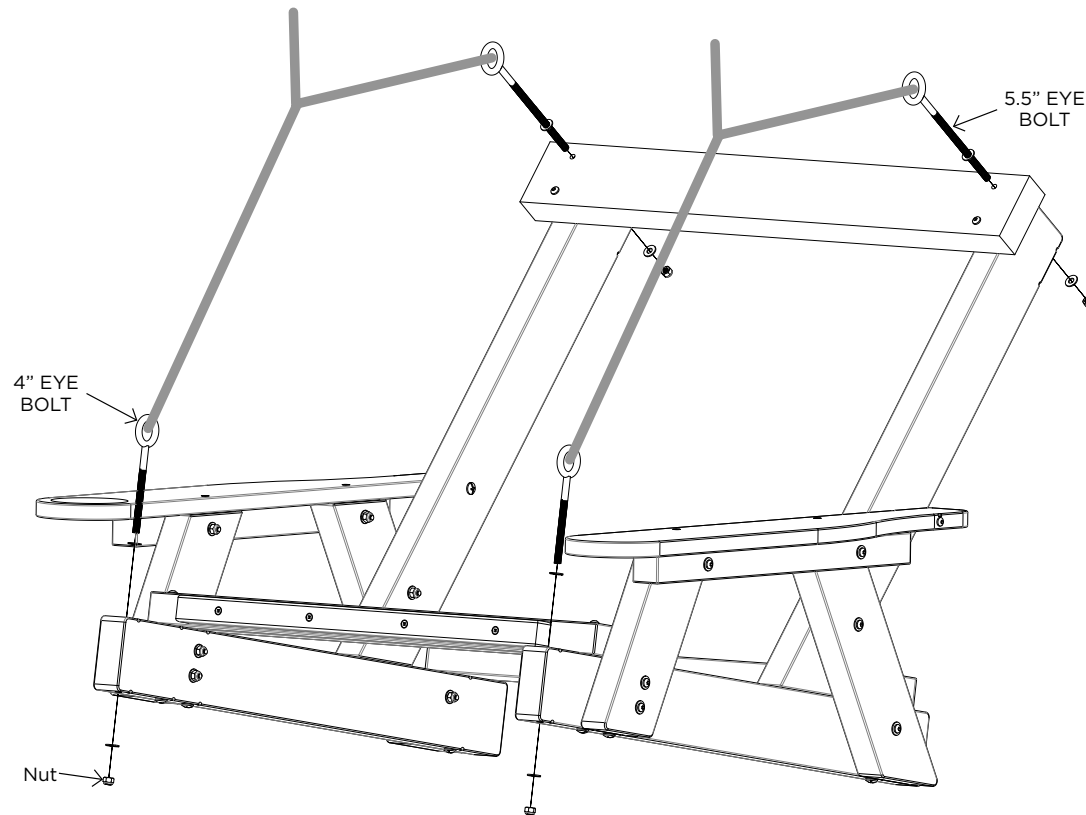

**Congratulations on purchasing this Original Nag's Head Single Rope Swing. QUESTIONS REGARDING THIS PRODUCT? Call our customer service team, 252-295-0405.**

**INSTALLATION** - Get somebody to help you, some pieces are heavy and a second pair of hands is always helpful. Do not tighten bolts until the product is fully assembled. Some pieces are harder to fit in place and this will help. A hammer or rubber mallet is needed during assembly. Do not over-tighten the bolts or screws. Build your item close to where it will be used to eliminate difficulty in moving once completed. For a uniform look, face all nuts in the same direction.

**MAINTENANCE** - Great care has been put into manufacturing this item. However, it is made of high density resin and some natural aesthetic imperfections and dark spots are normal and should be expected. You can wash the wood and the rope using a hose and some bleach water. You can also brush the wood to help remove dirt.


**Thoroughly inspect product before each use. Periodically check bolts after assembly and re-tighten when necessary.**

**WARRANTY & RETURNS** - Our Coastal Collections products are guaranteed to be free of defects in both workmanship and material. The Durawood Frame is backed by a limited lifetime warranty. In the unlikely event that any splintering, rotting, cracking, peeling, or chipping should ever occur on The Hammock Source will supply replacement parts, at no charge to you. This does not include negligence, improper use, animal damage or damage caused by natural disasters. Our Duracord Rope components are guaranteed free of defects in workmanship and materials for up to one year from the date of purchase. Prolonged exposure of the rope components to weather conditions including snow, rain, and humidity are not covered under the warranty, nor is damage caused by normal wear, mildew, or improper care, including storage, maintenance, and assembly. When using around fire, keep furniture at a minimum distance of 30 inches from the heat source. Prevent prolonged exposure to chlorinated water. Note that an original sales receipt must accompany any returned product, along with a Return Authorization Number from Nags Head Hammocks customer service; call (252) 295-0405.

**BOX/PARTS BREAKDOWN**

**ARM BOX:**

- (1) Left Arm Assembly
- (2) Right Arm Assembly

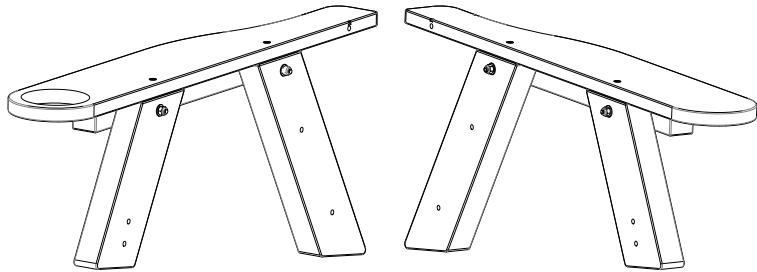

**BODY BOX:**

- (1) Top Roll-up
- (2) Outer Upright x 2
- (3) Body/Frame

(1)



(2)



(3)

